




FEATURES

- Full Stainless Construction
- Available on S1, S2, SB, S3, and S5 Series
- Can Be Mounted to 1/4" through 1" size valves
- Positive Spring Return to Closed Position
- "Dead-Man" Operation

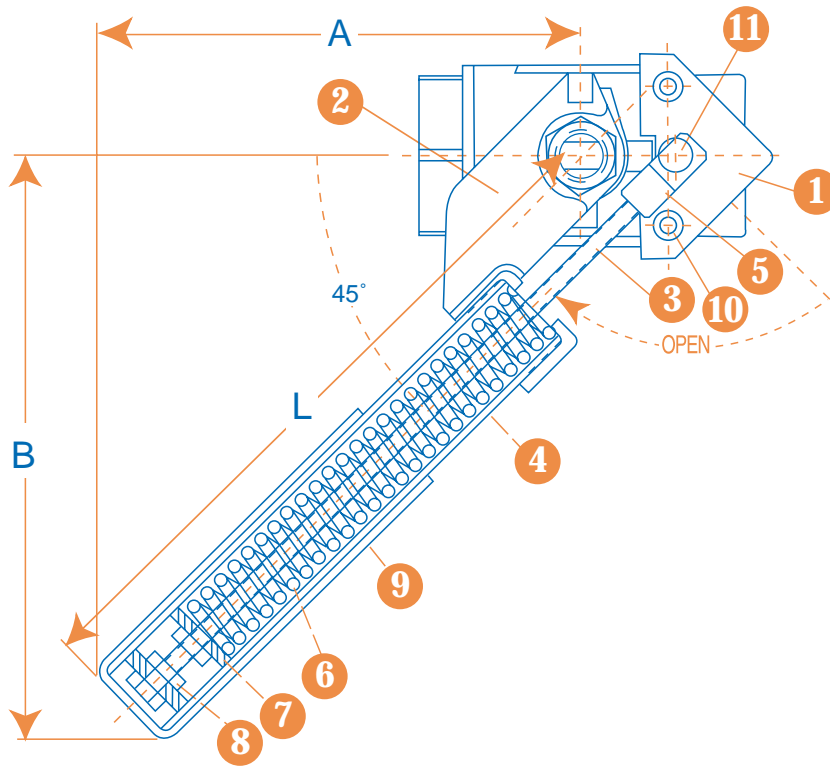

MATERIALS OF CONSTRUCTION

PART	DESCRIPTION	STANDARD MATERIAL
1	MOUNTING PLATE	ASTM A351 GR. CF8M
2	SUPPORT	ASTM A351 GR. CF8M
3	STEM	ASTM A276 GR. 316 SS
4	TUBE	ASTM A276 GR. 316 SS
5	CONNECTOR	ASTM A276 GR. 316 SS
6	SPRING	300 SERIES STAINLESS STEEL
7	WASHER (2)	ASTM A276 GR. 316 SS
8	LOCK NUT (3)	ASTM A276 GR. 316 SS
9	HANDLE GRIP	ORANGE VINYL
10	SOCKET HEAD CAP SCREWS	304SS
11	HEX PIVOT BOLT	ASTM A276 GR. 316 SS

DIMENSIONS & WEIGHTS

SIZE	A	B	L	WEIGHT LBS.
1/4" to 1/2"	4.9	5.8	7.1	0.8
3/4" to 1"	4.9	6	7.3	1.2



"SR" Option

NUMBERING SYSTEM ... HOW TO ORDER:

SIZE	SERIES	WORKING PRESSURE	FIGURE NUMBER WITH "SR" HANDLE OPTION
1/4"	S1-SS	1000 PSIG	S1FSSRRSRTT025
3/8"	S1-SS	1000 PSIG	S1FSSRRSRTT038
1/2"	S1-SS	1000 PSIG	S1FSSRRSRTT050
3/4"	S1-SS	1000 PSIG	S1FSSRRSRTT075
1"	S1-SS	1000 PSIG	S1FSSRRSRTT100
1/4"	S2-SS	2000 PSIG	S2FSSRRSRTT025
3/8"	S2-SS	2000 PSIG	S2FSSRRSRTT038
1/2"	S2-SS	2000 PSIG	S2FSSRRSRTT050
3/4"	S2-SS	2000 PSIG	S2RSSRRSRTT075
1"	S2-SS	2000 PSIG	S2RSSRRSRTT100
1/4"	SB-SS	2160 PSIG	SBFSSRGSRTT025
3/8"	SB-SS	2160 PSIG	SBFSSRGSRTT038
1/2"	SB-SS	2160 PSIG	SBRSSRGSRTT050
3/4"	SB-SS	2160 PSIG	SBRSSRGSRTT075
1"	SB-SS	2160 PSIG	SBRSSRGSRTT100
1/4"	S3-SS	3600 PSIG	S3FSSAFSRTT025
3/8"	S3-SS	3600 PSIG	S3FSSAFSRTT038
1/2"	S3-SS	3600 PSIG	S3FSSAFSRTT050
1/4"	S5-SS	5000 PSIG	S5FSSAFSRTT025
3/8"	S5-SS	5000 PSIG	S5FSSAFSRTT038
1/2"	S5-SS	5000 PSIG	S5FSSAFSRTT050

